









CONSTRUCTION PRODUCTS SINCE 1921

Quality Products • Technical Expertise • Trusted Service

Phipps helps contractors put work in place correctly and profitably by renting, selling, and servicing specialized equipment for concrete placing, finishing, surface preparation, climate control and demolition, as well as pumps used to apply construction sealants and coatings.

EQUIPMENT OVERVIEW

▲ Surface Prep

Products to prep your concrete and remove coatings prior to the installation of products and grinders to prep and polish.

- Concrete Placing and Finishing
 Compactors, Mixers, Buggies, Trowel Machines, and others to help
 with installation of your concrete pour.
- Cutting and Demolition
 Saws, as well as demolition robots, perfect for cutting and demolition jobs dealing with concrete and other surfaces.
- Dust Control

 HEPA filtration to contain dust particles to be paired with various tools and equipment ranging from large walk behind grinders to small vacuums for power tools.
- Pumps and Sprayers
 Grout pumps, coating and texture sprayers, injection pumps, and joint filler pumps to assist in the installation of your product.
- Generators

 Variety of systems to meet the small or heavy power requirements of your jobsite equipment.
- 28 Climate Control Equipment
 Variety of systems to control the changing climate of your jobsite.
- Vapor Abrasive Blasting
 Cleaner, easier, method to blast with less dust and minimal clean-up.



PRODUCTS TO PREP YOUR CONCRETE AND REMOVE COATINGS PRIOR TO THE INSTALLATION OF PRODUCTS AND GRINDERS TO PREP AND POLISH.

Cleveland: (800) 362-9267 Canton: (877) 258-7601 • Toledo: (800) 860-3352 www.chasephipps.com

8" Electric Scarifier	5
Smith 10" Electric Scarifier	5
Smith 10" Gas Powered Scarifier	5
Smith 15" Electric Scarifier	5
8" Electric Powered Shot Blaster	5
Blastrac 10" Propane Powered Riding Shot Blaster	5
20" Floor Buffer / Scrubber	5
24" Propane Powered Burnisher	
Self Propelled Walk Behind	
Floor Scraper	5
7700 Battery Powered Riding Scraper	6
Battery Powered Riding	
Scraper (Terminator)	6

Propane Powered Riding	
Scraper (8000)	6
72200 Pro Propane Riding Floor Scraper	6
7" Edge Grinder (EG-7)	6
PG 280 Grinder	6
PG 450 Grinder - 3 Head	6
18" Propane Floor Grinder	
TG-18)	6
PG 690 Propane Grinder - 3 Head	6
PG 540 Grinder - 3 Head	7
PG 830 RC Floor Grinder - 3 Head	7
Hand Held Electric Scarifier	7
/ariable Speed Hand Held	

Note: Pricing on all grinders includes up to 30 grit diamond segments and PCD's.

Our scarifiers include drum.

Shot sold separately.



8" Electric Scarifier

Standard Cutting Width:	<8 in	DAY \$305
Voltage:	220 V	WEEK \$915
Weight:	150 lbs	MONTH \$2745
Canal Languagh	EOfr	



Smith 10" Electric Scarifier

Motor: 5hp Electric 230 Volt Single Phase		DAY \$395 WEEK \$1185
Cutting Width/Depth:		MONTH \$3555
10 in Width, up to ¼ in depth		
Speed:	Up to 500 ft ²	
Cord Length:	50ft	
Weight:	250 lbs	
Power Requiremen	nts: 30 amp	



Smith 10" Gas Powered Scarifier

Motor:		DAY \$395
11 HP Honda		WEEK \$1185
Cutting Width/Depth:		MONTH \$3555
Up to 10 in v	vidth; ¼ in depth	
Speed:	Up to 500 ft ²	
Weight:	250 lbs	



Smith 15" Electric Scarifier

Power:	20 HP, 480V 3-Phase, 30 AMP	DAY \$475 WEEK \$1425
Removal:	Up to 15 in wide; 3/8 in depth	MONTH \$4275
Speed:	Up to 700 ft²/hr	
Weight:	1,081 lbs	
Cord Length:	50 Ft	



20" Floor Buffer / Scrubber

Motor:	1.75 HP; 115V 175/ 300 RPM - Dual Speed	DAY \$50 WEEK \$150
Pad Speed:	175/300 RPM	MONTH \$450
Switches:	Dual Levers with Safety Lock	



8" Electric Powered Shot Blaster

Blasting Capa	acity: Up to 350 ft²/hr	DAY \$285
Voltage:	110 V, 12 amp	WEEK \$855
Weight:	240 lbs	MONTH \$2565
Coverage rate	e per bag of shot: approx	x. 200 sq. ft.
Includes S26	Vac and Magnetic Sweet	ner



24" Propane Powered Burnisher

Width:	24 in	DAY \$150
Height:	39 in	WEEK \$450
Weight:	250 lbs	MONTH \$1350



Blastrac 10" Propane Powered Riding Shot Blaster

00 ft ² /hr WEEK \$2955
in MONTH \$8865
25 lbs



Self Propelled Walk Behind Floor Scraper

17-¾ in	DAY \$250
10-45 ft/min	WEEK \$750
425 lbs	MONTH \$2250
50 ft	
20	
	10-45 ft/min 425 lbs 50 ft

Note: Pricing on all grinders includes up to 30 grit diamond segments and PCD's.

Our scarifiers include drum.

Shot sold separately.



7700 Battery Powered Riding Scraper

Speed:	Up to 200 ft/min	DAY \$820
Voltage:	110 V	WEEK \$2460
Weight:	2572 lbs	MONTH \$7380
Width:	30 in	
Battery Life:	Up to 8 hrs	



Battery Powered Riding Scraper (Terminator)

Voltage:	110 V	DAY \$820
Width:	27 in	WEEK \$2460
Power:	5.5 HP Kubota	MONTH \$7380
Weight:	2,455 lbs	
Battery Life:	Up to 8 hrs	



Propane Powered Riding Scraper (8000)

Width:	30 in	DAY \$820
Height:	61 in	WEEK \$2460
Weight:	2887 lbs	MONTH \$7380



T2200 Pro Propane Riding Floor Scraper

Width:	27.5 in	DAY \$820
Weight:	2310 lbs	WEEK \$2460
		MONTH \$7380



7" Edge Grinder (EG-7)

Power		DAY \$105
Requirements:	2 HP, 12/240 Volts	WEEK \$315
Cup Wheel:	4.5 in-7 in	MONTH \$945
Weight:	70 lbs	
Cord Lenath:	30 ft	



PG 280 Grinder

Grinding Head:	11 in	DAY \$225
Grinding Pressure Total:	77 lbs	WEEK \$675
Weight:	154 lbs	MONTH \$2025
Segment Count:	6	
Cord Length:	50 ft	
Grindina Width:	11"	



PG 450 Grinder - 3 Head

Grinding Head:	7.1 in	DAY 305
Grinding Pressure Total:	152.1 lbs	WEEK \$915
Weight:	240.3 lbs	MONTH \$2745
Segment Count:	9	
Cord Length:	50 ft	
Grinding Width:	18"	



18" Propane Floor Grinder (TG-18)

Power Output:	18 HP	DAY \$325
Disc Width:	18 in	WEEK \$975
Weight:	360 lbs	MONTH \$2925
Seament Count:	9	



PG 690 Propane Grinder - 3 Head

Grinding Disc:	10.5 in	DAY \$450
Power:	22HP Propane	WEEK \$1350
Weight:	875 lbs	MONTH \$4050
Segment Count:	9 or 18	
Grinding Width:	25"	

Note: Pricing on all grinders includes up to 30 grit diamond segments and PCD's.

Our scarifiers include drum.

Shot sold separately.



PG 540 Grinder - 3 Head

Grinding Disc	: 9.5 in	DAY \$425
Power:	220V/1-phase, 30amp	WEEK \$1275
Weight:	475 lbs	MONTH \$3825
Segment Coun	t: 9 or 18	
Cord Length:	50 ft	
Grinding Widt	h: 20"	



PG 830 RC Floor Grinder - 3 Head

Grinding Disc:	10.5 in	DAY \$575
Power:	480V/3-phase, 30amp	WEEK \$1725
Grinding Widt	n: 32 in	MONTH \$5175
Segment Coun	t: 9 or 18	
Cord Length:	33 ft	
Grindina Widt	n: 31.5"	



Hand Held Electric Scarifier

Cutting Depth:	0 - 1/4 in	DAY \$75
Power:	15 Amps	WEEK \$225
Weight:	8.4 lbs	MONTH \$675



Variable Speed Hand Held Wet Polisher

4 in	DAY \$75
7 amps	WEEK \$225
700-3,000 RPM	MONTH \$675



Proper surface prep is an extremely important step in the application of new floor coatings, liquid, tile or otherwise. All Industrial coating manufacturers specifically call out for detailed surface prep in their specifications for their coating systems. The International Concrete Repair Institute (ICRI) has created a Concrete Surface Profile (CSP) chart for all manufactures and contractors to follow.

Diamond Grinding ICRI Profiles: 2 & 3

Diamond Grinding can produce a ICRI CSP of between 2 & 3. A number 2 is normally produced via grinding with diamond tooling of 30 grit.

Shot Blasting ICRI Profiles: 3 - 7

Shot blasting is capable of producing ICRI CSP profiles of between 3 - 7

typically

Scarification ICRI Profiles: 5 - 9

Scarifiers are capable of producing ICRI CSP Profiles between 5 - 9













	Industrial HEPA Vacuum (S26)	Propane Industrial HEPA Vacuum (S36)	Industrial HEPA Vacuum (S36)	HEPA Filter Vacuum (DC6000)	HEPA Filter Vacuum (T8600) Propane or Electric	Pre-Separator (C3000)
Drilling	•	•	•			•
Power Cutters	•	•	•			•
Wall Saws						•
Angle Grinders	•	•	•			•
Masonry Saws	•	•	•			•
Floor Grinders	•	•	•	•	•	•
Soff-Cut	•	•	•	•	•	•



CONCRETE PLACING AND FINISHING
COMPACTORS, MIXERS, BUGGIES, TROWEL MACHINES, AND OTHERS TO HELP WITH INSTALLATION OF YOUR CONCRETE POUR.

Cleveland: (800) 362-9267 Canton: (877) 258-7601 • Toledo: (800) 860-3352 www.chasephipps.com


Fully Hydraulic Riding Trowels	Spectra HV101 Laser Kit11
Power-Steering Riding Trowels 9	MAX Tool Rebar TwinTier RB441T 11
Mechanical Riding Trowels9	LF 80 Plate Compactor11
36" Walk Behind Trowel10	LF 100 Plate Compactor11
48" Walk Behind Trowel10	Backpack Concrete Vibrator11
24" Walk Behind Edging Trowel 10	Jumping Jack Rammer11
16 cu ft Concrete Buggy10	Handheld Concrete Vibrator11
16 cu ft Canycom SC75 Pivot Dump Buggy 10	Roller Tube Finisher 11
9 cu ft Power Pusher Electric Wheelbarrow 10	Minnich A-1 Series - On Grade 12
Gas or Electric Powered	Minnich A-2C Series - On Slab 12
Towable Mortar Mixer 10	Minnich A-3C Series - On Slab 12
MEGA Hippo Mixing Station 10	Ecovolve ED800 12
Portable Electric Powered Concrete Mixer 10	Ecovolve ED1000 12
Handheld Mixer11	Ecovolve ED1500 12

Combo blades come with rental. Finish blade and pans purchased separately.







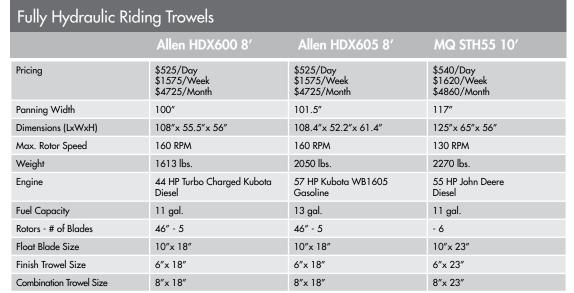







Power-Steering Riding Trowels				
	Allen MSP 470 8'	MQ HHXD5 8'	CRT 48, 57	
Pricing	\$415/Day \$1245/Week \$3735/Month	\$415/Day \$1245/Week \$3735/Month	\$415/Day \$1245/Week \$3735/Month	
Panning Width	95"	91"	95"	
Dimensions (LxWxH)	101"x 50"x 59"	98"x 50"x 54"	101"x 51"x 59"	
Max. Rotor Speed	180 RPM	170 RPM	150 RPM	
Weight	1450 lbs.	1440 lbs.	1456 lbs.	
Engine	444 HP Turbo Charged Kubota Diesel	Vanguard DM950DT Turbo Diesel	Kubota	
Fuel Capacity	6 gal.	9 gal.	6.5 gal.	
Rotors - # of Blades	46" - 5	- 5	5	
Float Blade Size	10"x 18"	10"x 18"	10"x 18"	
Finish Trowel Size	6"x 18"	6"x 18"	6"x 18"	
Combination Trowel Size	8"x 18"	8"x 18"	8"x 18"	







Mechanical Riding Trowels				
	Bartell TS78 6'	Bartell Titan 96 8'	Allen MSP 445 8'	
Pricing	\$275/Day \$825/Week \$2475/Month	\$350/Day \$1050/Week \$3150/Month	\$350/Day \$1050/Week \$3150/Month	
Panning Width			97.5"	
Dimensions (LxWxH)	78"x 41"x 52"	96"x 48"x 46"	101.5"x 50.5"x 59.5"	
Max Rotor Speed			165 RPM	
Weight	620 lbs.	904 lbs.	1052 lbs.	
Engine	25 hp Kohler CH740/CH740 Gasoline	Vanguard 37 HP Gasoline	Kohler CH1000, 6 gal. (999 cc) Gasoline	
Fuel Capacity	5 gal.	5 gal.	6 gal.	
Rotors - # of Blades	- 4	- 4	46" - 5	
Float Blade Size	10"x 14"	10"x 18"	10"x 18"	
Finish Blade Size	6"x 14"	6"x 18"	6"x 18"	
Combination Blade Size	8"x 14"	8"x 18"	8"x 18"	

Combo blades come with rental. Finish blade and pans purchased separately.



36" Walk Behind Trowel

Power Type:	Gas	DAY \$95		
Dimensions:	(L x H): 70" x 38"	WEEK \$285		
Blade Size:	14"	MONTH \$855		
Float Blade Size:	10" x 14"			
Finish Trowel Size: 6" x 14"				
Combination Trowel Size: 8" x 14"				
Weight:	198 lbs			



48" Walk Behind Trowel

Power Type:	Gas	DAY \$95	
Dimensions	(L x H): 89" x 39"	WEEK \$285	
Blade Size:	18"	MONTH \$855	
Float Blade Size:	10" x 18"		
Finish Trowel Size: 6" x 18"			
Combination Trow	el Size: 8" x 18"		
Weight:	252 lbs		



24" Walk Behind Edging Trowel

Power Type:	Gas	DAY \$95
Rotor Diameter:	24"	WEEK \$285
Blade Size:	9"	MONTH \$855
Combination Trov	wel Size: 5" x 9"	
Weight:	170 lbs	



16 cu ft Concrete Buggy

Travel Speed:	7.25 mph
Weight:	1135-1300 lbs

DAY \$125 WEEK \$375 MONTH \$1125



16 cu ft Canycom SC75 Pivot Dump Buggy

DAY \$200 WEEK \$600 MONTH \$1800

L x W x H:	95" x 35" x 57"	
Payload:	1655 lbs - 16 cu ft	
Travel Speed:	0-6 mph	



9 cu ft Power Pusher Electric Wheelbarrow

Capacity:	750 lbs	DAY \$12
Speed:	4 mph	WEEK \$33
Run Time:	6-8 hours full charge, 3-4 hours under load	MONTH \$1



Gas or Electric Powered Towable Mortar Mixer

Gas		DAY \$95
Dump Type:	Manual	WEEK \$285
Drum Capacity:	7 cu. ft. (3 ½ - 4 bags)	MONTH \$855
Engine:	Honda GX 160	
Electric		DAY \$115
Dump Type:	Manual	WEEK \$345
Drum Capacity:	9 cu. ft. (3 ½ - 4 bags)	MONTH \$1035
	(5 /2 - 4 bugs)	



MEGA Hippo Mixing Station

Power:	110v/20 amp	DAY \$90
Drill:	3 Speed -175/300/430 RPM	WEEK \$270
Capacity	7:23 gal 6 bags (50 lb)/350 lbs	MONTH \$810
Width:	23 ¾ in	
Weight:	109 lbs empty	



Portable Electric Powered Concrete Mixer

Max Drum Capacity:	3 cu. ft.	DAY \$70
Drum Type:	Poly	WEEK \$210
Power Source:	1.0 HP, 115 V, 60 Hz single phase el	MONTH \$630

Combo blades come with rental. Finish blade and pans purchased separately.



Power:	110v/10 amp
Cord Lenath:	13 ft

DAY \$30 WEEK \$90 MONTH \$270



Spectra HV101 Laser Kit

The HV101 laser transmitter is automatically self leveled in the horizontal and vertical planes and sends a continuous 360-degree laser reference

over the entire work area. The HV101 laser is easy to set up and use and is rugged enough for the toughest jobsite.

DAY \$70 **WEEK** \$210 **MONTH** \$630



MAX Tool Rebar TwinTier RB441T

Weight:	5.6 lbs	DAY \$65
Minimum Ties Per Coil:	145	WEEK \$195
Maximum Ties Per Coil:	265	MONTH \$585
Applicable Rebar Size:	# 3x #3 - #7	x #7
Ties Per Charge:	4000	
Tie Speed:	Approx. 1/2 se	эс
Tie Wraps:	2	
Battery Charge Time:	65 minutes full	charge



LF 80 Plate Compactor

Operating Weight:	181 lbs	DAY \$95
Centrifugal Force:	4361 lbf	WEEK \$285
Speed:	108 ft/min	MONTH \$855
Plate Width:	16.5"	



LF 100 Plate Compactor

Operating Weight:	236 lbs	DAY \$125
Centrifugal Force:	3754 lbf	WEEK \$375
Speed:	82 ft/min	MONTH \$1125
Plate Width:	19.7"	



Jumping Jack Rammer

Engine/Motor:	2 cycle - gasoline	DAY \$90
Percussion Rate Max:	687 blows/min	WEEK \$270
Operating Speed:	31.2 ft/min	MONTH \$810
Ramming Shoe Size:	9.8"wide x 13.4"	long
Weight:	130 pounds	



Backpack Concrete Vibrator

Engine:	4 cycle with a heavy duty clutch	DAY \$65 WEEK \$195
Weight:	30 pounds	MONTH \$585
Frame:	Lightweight steel	
Whip Length	n: 10'	
Head Size:	1½" Head	



Handheld Concrete Vibrator

Engine:	Double insulated motor	DAY \$65
Weight:	14.5 lbs	WEEK \$195
Power:	15 amps	MONTH \$585
Whip Length	n: 10'	
Head Size:	1¾" Head	



Roller Tube Finisher

Weight:	220 lbs	DAY \$250
Engine:	Kohler CH440	WEEK \$750
Tube Diameter:	6.5 in	MONTH \$2250
Tube Length:	Choice of 6, 8, 14, 1	6, 18, or 26 ft



Minnich A-1 Series - On Grade

Weight:	200 lbs	DAY \$170
SCFM Requirement:	185	WEEK \$510
Drill Depth:	10" or 18"	MONTH \$1530
Clearance Needed:	36" (for 10" depth)	
	48" (for 18" depth)	



Minnich A-2C Series - On Slab

Weight:	900 lbs	DAY \$260
SCFM Requirement:	375	WEEK \$780
Drill Depth:	18"	MONTH \$2340
Clearance Needed:	48"	
Includes Dust Collection	on System	



Minnich A-3C Series - On Slab

Weight:	2250 lbs	DAY \$320
SCFM Requirement:	375	WEEK \$960
Drill Depth:	18"	MONTH \$2880
Clearance Needed:	48"	
Includes Dust Collection	on System	

THE ELECTRIC DUMPER RANGE FROM ECOVOLVE is the world's

only fully electric hi-tip dumper. The dumpers are available in three different weight capacities - 1763 lb, 2200 lb and 3300 lb skip. There are no fumes, no emissions, low noise and the steering system significantly reduces the risk of unwanted tire marks. What's more is that the super elastic tires eliminate the possibily of puncture, making the ED Range suitable for both indoors and out.

The electric dumper is perfect for use where operating levels must be low while the compact size and small turning circle means the ED can go where others can't.



Ecovolve ED800

Load Capacity (lbs):	1763	DAY \$225
Speed (mph):	0-4	WEEK \$675
Run time (hrs):	8-10	MONTH \$2025
Recharge (hrs):	8	
Drive Motor:	5KW/7HP	
Charge Requirements:	110 V	



Ecovolve ED1000

Load Capacity (lbs):	2200	DAY \$250
Speed (mph):	0-5	WEEK \$750
Run time (hrs):	8-10	MONTH \$2250
Recharge (hrs):	8	
Drive Motor:	5KW/7HP	
Charge Requirements:	110 V	



Ecovolve ED1500

Load Capacity (lbs):	3300	DAY \$275
Speed (mph):	-6	WEEK \$825
Run time (hrs):	8-10	MONTH \$2475
Recharge (hrs):	10	
Drive Motor:	8KW/11H	-IP
Charge Requirements:	220 / Sin	gle Phase 30 amp

	† HIGH TIP XX N	NO EMISSIONS KNO NOISE	ED800	ED1000	ED1500
CAPACITY	Max safe load (Lbs) Unladen weight (Lbs) Skip	- Leveled (Cubic feet) - Heaped (Cubic feet) - Water level (Gallons)	1763 2650 12 17 60	2200 2866 15 21 83	3300 3300 20.3 28.2 121
DRIVE	Drive type Steering Speed (Mph) Steering angle Grade ability		1 wheel drive 1 wheel steer 0-4 90° 15°	1 wheel drive 1 wheel steer 0-5 90° 15°	3 wheel drive 1 wheel steer 0-6 90° 15°
TRANSMISSION	Proportional Steering Tires Brakes	- Front (2no. Super elastic) - Rear (1no. Super elastic)		Drive Electric 27x8,5x15 21x8x9 namic electric bra gative parking bra	
HYDRAULIC SYSTEM	Gear pump Pump motor (KW) Hydraulic tank capacity	- Flow rate (Gallon/Min) - Oper. pressure (PSI) (Gallons)	1.45 1900 2.2 0.74	1.45 1900 2.2 0.74	1.72 2100 2.2 1.32
ELECTRIC SYSTEM	Voltage (V) Battery (Ah) Integrated Charging Recharge (Hrs)	- Input (V AC) - Output (V DC)	24 400 100-240 24 8	24 400 100-240 24 8	24 600 100-240 24 10
DRIVE	Type Output Emission		5KW/7HP Zero	Induction Motor 5KW/7HP Zero	8KW/11HP Zero
NOISE	Driving (Db) Buzzer [adjustable] (Db)		65 60-80	65 60-80	65 60-80
	Turning circle radius 63 inch 90° steering angle		34 B3.	8	C1 Q2 D2 D3
				UNLADEN	LADEN

(in)	Α	A1	A2	А3	A4	A5	B1	B2	В3	В4	C1	C2	
ED800	103	64	58	44	8.3	51.5	81.3	94	13.0	50	32	23	2
ED1000	103	64	58	44	8.3	51.5	86.6	101	13.0	50	38	30	SPOIN SPOIN
ED1500	114	71	63	45	8.3	53	88.4	101.4	13.0	52.2	46.2	38.4	ع ا

	D1/D3	D2	D1/D3	D2
	617 lbs	1500 lbs	1433 lbs	1543 lbs
222	683 lbs	1500 lbs	1730 lbs	1609 lbs
r F	827 lbs	1653 lbs	2480 lbs	1653 lbs



CUTTING AND DEMOLITION EQUIPMENT
SAWS, AS WELL AS DEMOLITION ROBOTS, PERFECT FOR CUTTING AND DEMOLITION JOBS DEALING WITH CONCRETE AND OTHER SURFACES.

Cleveland: (800) 362-9267 Canton: (877) 258-7601 • Toledo: (800) 860-3352 www.chasephipps.com

7"- 9" Walk Behind Concrete Saw	
Soff-Cut 150 Walk Behind Saw Saw 15	
Soff-Cut 2000 Walk Behind Saw 15	
Soff-Cut 4000 Walk Behind Saw 15	
Soff-Cut 4200 Walk Behind Saw 15	
Soff-Cut 1000 Soff-Vac	
FS400 Walk Behind Saw	
FS 3500 30" Gas or Electric	
Walk Behind Saw	
K 4000 Electric Cut-N-Break Saw 16	
K 760 Gas Cut-N-Break Saw 16	
K 4000 Electric Power Cutter Saw 16	
K 770 14 in Cut-Off Saw	
K 770 VAC Concrete Saw w/	
Dust Control	
DeWalt D25980 Electric Breaker 16	
Rotary Demo Hammer SDS-Max 16	
Rotary Demo Hammer 11/8" SDS-Plus 16	

Husqvarna DXR 140, DXR 270 &
DXR 300 Demolition Robots17
Grappler17
Crusher17
Steel Shears17
Standard Bucket17
Drum Cutter
Breaker1 <i>7</i>
Ecovolve ED800 18
Ecovolve ED100018
Ecovolve ED150018
GCT-14, 14" Dustless Electric Saw 19
GCT-10, 9" Electric Saw19
4.5" Crack Chasing Saw19
Stand-Up Joint Clean-Out Saw
Arbortech Brick and Mortar Saw 19
Husqvarna Hand Held Core Drill19
Fein MultiMaster Tool19
5" Grinder with Tuckpointing Shroud 19

Note: Blades included with Rental.



7"- 9" Walk Behind Concrete Saw

Engine Type:	Honda GX 200	DAY \$85
Max Cutting Depth:	3.25 in	WEEK \$255
Power Requirements:	15A-120v	MONTH \$765
Weight:	60 lbs	



Soff-Cut 150 Walk Behind Saw

Max Cutting Depth:	1.18 in	DAY \$105
Power:	5.5 HP	WEEK \$315
Weight:	87 lbs	MONTH \$945



Soff-Cut 2000 Walk Behind Saw

Max Cutting Depth:	1.5 in	DAY \$285
Motor:	Honda GX390	WEEK \$855
Weight:	347 lbs	MONTH \$2565



Soff-Cut 4000 Walk Behind Saw

Max Cutting Depth:	2.75 in	DAY \$350
Motor:	Kohler	WEEK \$1050
Weight:	420 lbs	MONTH \$3150



Soff-Cut 4200 Walk Behind Saw

Cutting Depth:	11/8 to 3 in	DAY \$390
Motor:	Kohler CH680	WEEK \$1170
Weight:	488 lbs	MONTH \$351



Soff-Cut 1000 Soff-Vac

Power:	11 hp
Engine:	Gasoline
Weight:	513 lbs

DAY \$185 WEEK \$555 MONTH \$1665



FS400 Walk Behind Saw

Max Cutting Depth:	75/8 in	DAY \$150
Motor:	Honda GX390	WEEK \$450
Weight:	219 lbs	MONTH \$1350
Blade Diameter:	20"	



FS 3500 30" Gas or Electric Walk-Behind Saw

Gas		DAY \$275
Max Cutting Depth:	123/8"	WEEK \$825
Motor:	Kohler	MONTH \$2475
Horsepower:	37 hp	
Fuel Capacity:	6 Gallon	
Weight:	970 lbs	



Electric		DAY \$275
Max Cutting Depth:	Electric: 12"	WEEK \$825
Motor:	Lincoln	MONTH \$2475
Horsepower:	30 hp	
Power Requirements:	480 v/ 3 phase	
Weight:	1486	

^{*} Note: Compatible with all soff-cutt saws

Note: Blades included with Rental.



K 4000 Electric Cut-N-Break Saw

Max Cutting Depth:	16 in	DAY \$110
Power:	15 amps 120 volts	WEEK \$330 MONTH \$990
Blade Diameter:	9 in	
Weight:	18 lbs	



K 760 Gas Cut-N-Break Saw

Max Cutting Depth:	16 in	DAY \$110
Power:	5 hp	WEEK \$330
Blade Diameter:	9 in	MONTH \$990
Weight:	28.7 lbs	



K 4000 Electric Power Cutter

Max Cutting Depth (w/o vac unit):	5 in	DAY \$90 WEEK \$270
Power:	2.5 hp 120 volts	MONTH \$810
Max Diamond Blade:	14 in	
Weight:	17.4 lbs	



K 770 14 in Cut-Off Saw

Max Cutting Depth:	5 in	DAY \$90
Power:	5 hp	WEEK \$270
Max Diamond Blade:	14 in	MONTH \$810
Weight:	21.2 lbs	



K 770 VAC Concrete Saw with Dust Control

Max Cutting Depth:	5 in	DAY \$105
Motor:	Subaru EX13	WEEK \$315
Blade Size:	12"	MONTH \$945
Weight:	24.2 lbs	



DeWalt D25980 Electric Breaker

Chuck Type	11/8" Hex	DAY \$105
Tool Weight	68.3 lbs	WEEK \$315
Power	15 amps	MONTH \$945
Tool Length	30.75 in	
Impact Energy	52 joules	
Bits Included:	Moil Point, Clay Spo	de, 2 in Chisel



Rotary Demo Hammer SDS-Max

For use with SDS-Max bits.
Drill bits sold separately.

DAY \$85 WEEK \$255 MONTH \$765



Rotary Demo Hammer 11/8" SDS-Plus

For use with SDS-Plus bits. Drill bits sold separately. DAY \$65 WEEK \$195 MONTH \$585

Husqvarna DXR 140, DXR 270 & DXR 300 Demolition Robots

Applications:

- Perfect for demolition and smaller excavation work in concrete and brick structures, both indoors and out. It is also suitable for pile-driving, staircases, and roof applications.
- Efficient in tough, dirty environments such as steel and cement processing plants.
- Small design enables work in confined spaces, such as basements.

- Easy to remove side covers to facilitate service and inspection.
- ullet 360° of rotation, based on a hydraulic/electrical swivel technique, allows a more flexible work area.
- Individually controlled outriggers enable it to work on uneven work surfaces or
- Low machine profile does not block the line of sight.
- Zero exhaust emissions. 100% electric over hydraulic operation.

Specifications	DXR 140	DXR 270	DXR 300
Reach (forward)	145"	176.4"	192"
Reach (up)	173"	188.4"	204"
Weight	2171 lbs	3858 lbs	4303 lbs
Recommended Generator Size	40kw	50kw	50kw

^{*}Comes with 100ft cord




Grappler

Suitable for demolishing masonry or wooden structures. Can pick up materials to sort and load.



brick in buildings, staircases, and roofs where low noise and minimal vibrations are required.





Steel Shears

Ideal for use in sensitive areas such as process industries, as well as demolition of structures, steel, and piping.



Standard Bucket

Ideal for excavation and debris removal.



Drum Cutter

Made for surface profiling rock or concrete, trenching, excavating frozen soil, soft rock excavation in quarries, demolition and dredging.



Breaker

Outstanding power to weight ratio and quick and easy to position. Typical applications are road construction, smaller trenching and demolition jobs.

THE ELECTRIC DUMPER RANGE

FROM ECOVOLVE is the world's only fully electric hi-tip dumper. The dumpers are available in three different weight capacities - 1763 lb, 2200 lb and 3300 lb skip. There are no fumes, no emissions, low noise and the steering system significantly reduces the risk of unwanted tire marks. What's more is that the super elastic tires eliminate the possibily of puncture, making the ED Range suitable for both indoors and out.

The electric dumper is perfect for use where operating levels must be low while the compact size and small turning circle means the ED can go where others can't.



Ecovolve ED800

1763	DAY \$225
0-4	WEEK \$675
8-10	MONTH \$2025
8	
5KW/7HP	
110 V	
	0-4 8-10 8 5KW/7HP



Ecovolve ED1000

Load Capacity (lbs):	2200	DAY \$250
Speed (mph):	0-5	WEEK \$750
Run time (hrs):	8-10	MONTH \$2250
Recharge (hrs):	8	
Drive Motor:	5KW/7HP	
Charge Requirements:	110 V	



Ecovolve ED1500

Load Capacity (lbs):	3300	DAY \$275
Speed (mph):	0-6	WEEK \$825
Run time (hrs):	8-10	MONTH \$2475
Recharge (hrs):	10	
Drive Motor:	8KW/11I	-IP
Charge Requirements:	220/Sing	le Phase 30 Amp



GCT-14, 14" Gas Dustless Saw

Engine:	Honda 11.7HP	DAY \$120
Cutting Depth:	Up to 4 in	WEEK \$360
Max Blade Size:	14 in	MONTH \$1080
Weight:	200 lbs	
Vacuum Requirements:	300 CFM Minin	num



4.5" Crack Chasing Saw

Power Requirements: Cutting Depth: Max Blade Size:	120V, 15amp 3/4 in 4.5 in	DAY \$95 WEEK \$285 MONTH \$855
Weight: Vacuum Requirements:	33 lbs	МЭ ГГГГ ФОЗЭ



Arbortech Brick and Mortar Saw

The AS170 Brick + Mortar Saw represents a revolution in cutting technology. Using a unique patented orbital cutting motion with two forward facing blades that combine to perform both a hammering and cutting action. Blade not included.





Fein MultiMaster Tool

FEIN SuperCut is the right power tool for all professionals in the interior and renovation trades. With a 400 Watt motor and stronger oscillation movement, the FEIN Supercut means maximum progress, resulting in time and cost savings. Blade not included.





GCT 10, 9" Electric Saw

Power Requirements: Cutting Depth:	120V, 20amp Up to 2 1/4"	DAY \$105 WEEK \$315
Max Blade Size:	8 to 9 in	MONTH \$945
Weight:	70 lbs	
Vacuum Requirements:	250 CFM	



Stand-Up Joint Clean-Out Saw

Max Cutting Depth:	2 in	DAY \$125
Power:	15 Amp,	WEEK \$375
	115V, 60Hz	MONTH \$1125
Max RPM:	6,600 RPMs	
Blade Diameter:	7-8 in Dry Dio	ımond
Weight:	56 lbs	



Husqvarna Hand Held Core Drill

The Husqvarna Handheld Core Drill is a core drill for drilling up to 4in. diameter openings. The unit can be used for a variety of applications including making holes for ventilation, plumbing pipes, joints, electrical sockets and telecom cables. For use with DRI5 and hand-held core bits. Core bits are not included.

DAY \$50 WEEK \$150 MONTH \$450



5" Grinder with Tuckpointing Shroud

Robust tuck pointing system with dust extraction for quick removal of mortar joints.

DAY \$40 WEEK \$120 MONTH \$360



DUST CONTROL EQUIPMENTHEPA FILTRATION TO CONTAIN DUST PARTICLES TO BE PAIRED WITH VARIOUS TOOLS AND EQUIPMENT RANGING FROM LARGE WALK BEHIND GRINDERS TO SMALL VACUUMS FOR POWER TOOLS.

Cleveland: (800) 362-9267 Canton: (877) 258-7601 • Toledo: (800) 860-3352 www.chasephipps.com

10 Gallon HEPA Vacuum (DWV102)	2
Industrial HEPA Vacuum (S26)	21
Propane Industrial HEPA Vacuum (S36)	
Industrial HEPA Vacuum (S36)	21
HEPA Filter Vacuum (DC6000)	21
HEPA Filter Vacuum (T8600) Propane or Electric	21
Pre-Separator (C3000)	21

DUST CONTROL EQUIPMENT



10 Gallon HEPA Vacuum (DWV102)

Air Flow Cap	acity: 150 CFM	DAY \$40
Voltage:	110V	WEEK \$120
Weight:	33 lbs	MONTH \$360
CFM:	150	



Industrial HEPA Vacuum (S26)

Air Flow Cap	acity: 258 CFM	DAY \$85
Voltage:	120 V	WEEK \$255
Weight:	127 lbs	MONTH \$765
CFM:	258	



Propane Industrial HEPA Vacuum (S36)

Air Flow Cap	acity: 285 cfm	DAY \$195
ower:	10 HP	WEEK \$585
Veight:	454 lbs	MONTH \$1755
`FAA.	3.53	



Industrial HEPA Vacuum (S36)

acity: 353 CFM
220 V/14 amps
140 lbs

DAY \$160 **WEEK** \$480 **MONTH** \$1440



HEPA Filter Vacuum (DC6000)

Voltage:	480 V/ 3 Phase	DAY \$195
Rated Current:	19.5 amps	WEEK \$585
Weight:	672 lbs	MONTH \$1755



HEPA Filter Vacuum (T8600) Propane or Electric

	Propane	Electric	DAY \$205
Power Supply:	Kawasaki	3-phase	WEEK \$615
Airflow:	410	353	MONTH \$1845
Weight:	628	454	
CFM:	410	3.53	



Pre-Separator (C3000)

Capacity: 10 Gallon	
Weight: 49 lbs	

DAY \$85 WEEK \$255 **MONTH** \$765













	Industrial HEPA Vacuum (S26)	Propane Industrial HEPA Vacuum (S36)	Industrial HEPA Vacuum (S36)	HEPA Filter Vacuum (DC6000)	HEPA Filter Vacuum (T8600) Propane or Electric	Pre-Separator (C3000)
Drilling	•	•	•			•
Power Cutters	•	•	•			•
Wall Saws						•
Angle Grinders	•	•	•			•
Masonry Saws	•	•	•			•
Floor Grinders	•	•	•	•	•	•
Soff-Cut	•	•	•	•	•	•



PUMPS AND SPRAYERSGROUT PUMPS, COATING AND TEXTURE SPRAYERS, INJECTION PUMPS, AND JOINT FILLER PUMPS TO ASSIST IN THE INSTALLATION OF YOUR PRODUCT.

Cleveland: (800) 362-9267 **Canton:** (877) 258-7601 • **Toledo:** (800) 860-3352 www.chasephipps.com



Chemgrout CG555 Piston Driven	
Pump & Mixer Trailer2	3
Electric Corrousel Pump w/Mixer 2	3
Carrousel Pump Electric2	3
Quikspray Mixer - Electric	3
ToughTek P30 Rotor-Stator Pump2	3
ToughTek CM40 Continuous Mixer 2	3
ToughTek S340e Portable Pump/Sprayer 2	3
Graco 833 Gas Powered Big	
Rig Sprayer 2	3
Graco 7900 Gas-Powered Sprayer 2	3

Air-Operated Grout Pump	
(GP-3A)	24
Dual Component Polyurea Pump	24
Injection Pump (P2002)	24
2:1 Injection Pump (P3003)	24
Bartell S201 Curing Compound	
Drum Sprayer	24
Pressure Washer - 4000 PSI	24
32" Concrete Cleaner	24
MQ 525 Water Trailer	24



Chemgrout CG555 Piston Driven Pump & Mixer Trailer

Designed to mix and pump a variety of products, including neat cement, self-levelers, and most packages grout mixes.

Mixing Tank:	45 gal	DAY \$525
Holding Hopper:	12 gal	WEEK \$1575
Max Output:	8 GPM	MONTH \$4725
Includes:	Up to 150 ft of hose	



Quikspray Mixer - Electric

Designed to allow lower dumping heights for a variety of containers.

Power:	110V	DAY \$12
Volume:	4+ cu/ft working capacity	WEEK \$3
Height:	27.5 in min - 46 in max	MONTH \$1
Power Source:	Electric	



ToughTek S340e Portable Pump/Sprayer

Graco's piston pump technology easily handles low, medium, and high-density materials.

Power:	120V, 15amp	DAY \$375
Weight:	150 lbs	WEEK \$1125
Includes:	1.5 in x 30 ft hose	MONTH \$3375



Electric Carrousel Pump w/ Mixer – 2'' Hose

All in one pump and mixer that can be sprayed overhead. Applications include form and pour concrete repair materials, construction grouts, epoxy grouts and shotcrete materials.

Power:	220V / 50amp	DAY \$450
Size:	100 gal hopper	WEEK \$1350
Includes:	2"x50' hose and	MONTH \$4050
	Stucco/Shotcrete Gun	



ToughTek P30 Rotor-Stator Pump

Used for underlayments with a maximum distance of 100'+. Adjustable flow rate with an output of 200 bags per hour.

Power:	230V, 30 amp/single-phase	DAY \$375
Size:	16-gallon hopper/ 2.2 cu. Ft.	WEEK \$1125 MONTH \$3375
Hose Length:	66 foot or 132 foot (depending on application)	



Graco 833 Gas Powered Big Rig Sprayer

DAY \$325 **WEEK** \$975

Gas hydraulic unit that can spray it all including asphalt emulsions, waterproofing, elastomeric acrylics, and mastics. *Do not use with Silicones.

Weight:	150 lbs
Includes:	50ft airless hose and
	3ft whip hose



Carrousel Pump Electric – 1.5" Hose

Pump and spray a variety of commercial products – epoxy, grout, cement, or plaster with or without aggregate.

Electric Power:	110V/15amp	DAY \$375
Size:	13 gal hopper	WEEK \$1125
Hose Length:	20 ft	MONTH \$3375



ToughTek CM40 Continuous Mixer

Ideal for larger projects, the ToughTek CM40 continuous mixer will improve your crew's production rates with an output of up to 300 bags per hour of self-leveling underlayment.

Power:	230V, 30 amp/single-phase	DAY \$205
Size:	16-gallon hopper/	WEEK \$615
	2.2 cu. Ft.	MONTH \$1815
Output:	Up to 300 bags per hour	



Graco 7900 Gas-Powered Sprayer

Can spray all paints, acyrlics, polyurea, and cold tar.

Weight:	185 lbs
Includes:	50 ft airless hose and
	3 ft whip hose

DAY \$105 WEEK \$315 MONTH \$945



Air-Operated Grout Pump (GP-3A)

Pumps most types of cementitious grout (not for epoxy-type grouts).

Weight: 20 lbs
CFM Recommendation: 10
Includes: 7 ft of hose

DAY \$80 WEEK \$240 MONTH \$720



Dual Component Polyurea Pump

For use with non-filled epoxy and polyurea with a 1:1 ratio.

Power: Electric Battery
Weight: 150 lbs

DAY \$345 WEEK \$1035 MONTH \$3105



Injection Pump (P2002) Single Component Material

This extremely light-weight and powerful injection pump is suitable for mid-size urethane injection products with viscosities between 10 and 1000 cps.

 Power:
 110V Electric

 Weight:
 10 lbs

 Viscosities:
 Between 10 and 1000 cps

DAY \$60 WEEK \$180



2:1 Injection Pump (P3003) -2 Component Material

Used for dual component epoxy and/or polyurethane injection resin with viscosities between 10 and 1000 cps.

Power:	110V Electric
Weight:	15 lbs
Viscosities	Between 10 and 1000 cps

DAY \$80 WEEK \$240 MONTH \$720



Bartell S201 Curing Compound Drum Sprayer

Used for form oils, pigmented curing compounds, bond breakers, soaps and detergents, post control liquids, and most liquid type materials.

Engine:	Honda GX120	DAY \$95
Power:	5.5 hp	WEEK \$285
Weight:	110 lbs	MONTH \$855
Includes:	50 ft of hose	
Max Solids Content:	40%	



Pressure Washer - 4000 PSI

Pressure:	4000 PSI	DAY \$70
Flow:	3.5 GPM	WEEK \$210
Engine:	Honda GX390	MONTH \$630
Weight:	191 lbs	
Includes:	50 ft of hose	



32" Concrete Cleaner

Needs 4000 PSI Pressure Washer to use.

Pressure: 4000 PSI Cold Water Weight: 120 lbs

DAY \$45 WEEK \$135 MONTH \$405



MQ 525 Water Trailer

Tank Size:	525 Gallons	DAY \$190
Trailer:	DOT Certified, Dual Axle	WEEK \$540
Engine:	Honda GX120 Recoil Start	MONTH \$1620
Pump:	Multiquip QP2H 2 in Centrifugal	
Weight:	1428 lbs	
Hose Reel Length:	50 ft, 200 psi	

Related Products

QuikSpray Pump – All In One Mix, Pump, Spray

Pump applications include:

- Form and Pour Concrete Repair Materials
- Construction Grouts
- Epoxy Grouts
- Shotcrete Materials
- Air Requirements, 185 cfm

Products Used:

- SikaCem 226
- Masterbuilders 648 Epoxy Grout
- General Purpose Grout

QuikSpray Carrousel Pump

Applications include:

- Form and Pour Concrete Repair Materials
- Construction Grouts
- Epoxy Grouts
- Air Requirements, 6-10 cfm for spraying

Products Used:

- Masterbuilders 648 Epoxy Grout
- General Purpose Grout
- Sprayable Material

Dual Component Polyurea Pump Dispensing system for polyurea joint fillers

Applications include:

Commercial and industrial floors

Products Used:

Qwikjoint UVR











Single Component Urethane Injection (P2002) / Two-Component Epoxy Injection (P3003)

Applications include:

Vertical and Overhead Epoxy and Urethane Injection

Products Used:

- Sika 35 Hi-Mod (2 component or epoxy)
- Sikafix HH (Single component)



GENERATORS

VARIETY OF SYSTEMS TO MEET THE SMALL OR HEAVY POWER REQUIREMENTS OF YOUR JOBSITE EQUIPMENT.

Cleveland: (800) 362-9267 Canton: (877) 258-7601 • Toledo: (800) 860-3352 www.chasephipps.com

Generac 17K kW Generator	27
Generator - 5,000 Watt	27
Tow-Behind Generator (Diesel)	27
Makiney 23kW 480 Volt 3-Phase Portable Generator	27

GENERATORS



Generac 17K kW Generator

AC Rated Output	t	DAY \$95
Running Watts:	17500	WEEK \$285
AC Voltage:	120/240 VAC	MONTH \$855
Weight:	250 lbs	_



Generator - 5,000 Watt

Rated Output:	4500 W
Voltage:	120/240 V
Weight:	172 lbs

DAY \$75 WEEK \$225 MONTH \$675



Tow-Behind Generator (Diesel)

Capacity:	165 gal.	DAY \$300
Run Time:	31 hr.	WEEK \$900
Fuel Consumption of	t Prime: 100% - 4.78 gph	MONTH \$2700
	75% - 3.74 gph	
	50% - 2.6 gph	
Power:	56-69 kW, single or 3-phase	



Makinex 23kW 480 Volt 3-Phase Portable Generator

Rated Output:	23000 W	DAY \$225
Voltage:	120/480V, 3-phase	WEEK \$675
Weight:	410 lbs	MONTH \$2025



CLIMATE CONTROL EQUIPMENT VARIETY OF SYSTEMS TO CONTROL THE CHANGING CLIMATE OF YOUR JOBSITE.

Air Movers

Dehumidifiers

HEPA Air Scrubbers

Portable Electric Heaters

Ground Thaw Systems

Hydronic Heaters

Air Conditioning

Features:

- We can control your jobsite climate through different components
- Outside of structure combustion
- Heat produced through heat exchanges
- Up to 3-5x greater fuel savings than traditional direct fired heating systems



Contact our Climate Control Specialist to evaluate your project heating specifications and provide a solution for a Hydronic Heating System.

Heath Warner: 419-466-3244 • hwarner@chasephipps.com

CLIMATE CONTROL EQUIPMENT

HYDRONIC CLIMATE CONTROL



The ultimate in fuel efficiency and building environment control. Rugged equipment designed to provide all the benefits of a permanent HVAC system while saving the permanent system from the wear and tear of construction.

FUEL OPTIONS







HYDRONIC HEAT

- Zero interior emissions for fume free work area
- Dry and evenly distributed heat for temperature and humidity control
- Fully MERV9 and MERV13 filterable air standard with the option to add HEPA filtration
- Tremendous fuel savings of 50-70% than traditional heating methods
- Total control of building environment leading to complete production schedule control
- Capability of heating from 300 to 1.5 mil BTU

RECIRCULATING INDIRECT HEAT



Units are placed outside forcing heated air into the structure through ducting. Heated air from within the structure is circulated back to the heating unit to increase fuel efficiency.

FUEL OPTIONS







RECIRCULATING INDIRECT:

- 30-50% less fuel usage than traditional heating methods
- Lower moisture levels entering
- Fume free workspaces
- More even temperature distribution
- Remote thermostat availability
- Modular and fuel flexible
- Capability of heating 600 to 1 mil BTU

HE PHIPPS ADVANTAGE: tal Project Control	PHIPPS HYDRONIC CLIMATE CONTROL	PHIPPS RECIRCULATING INDIRECT HEAT	NON-RECIRCULATING INDIRECT AND OPEN FLAME
Fume free interior	V	V	0
Quiet operation	~	~	0
Thermostatically controlled interior	Y	~	X
Modular system flexibility	~	~	×
24/7 monitoring with alert features	~	0	×
Recirculating air within workspace	FULLY RECIRCULATING	RECIRCULATING	X
MERV filtration	0	×	X
Fuel source conversion	0	0	×
Self-restarting due to power disruption	Y	×	×
Operational fuel savings	50-70%	30-50%	×
= STANDARD			

CLIMATE CONTROL EQUIPMENT

GROUND THAW



- All hose reels includes 4,500 lf of ground-thaw hose.
 - Capable of 9,000 sq ft of ground-thaw or 13,500 lf of concrete cure
- Traditional trailer systems available that include a generator and extended running fuel cell
- Custom project solutions with multiple unit sizes
 - Three different sizes of individual heating units and hose reels available
 - The ability to power 1-5 hose reels off a single unit allowing for up to 54,000 sq ft of ground-thaw or 81,000 sq ft of concrete cure to be accomplished from a single source
- Fuel flexibility- Unlike traditional ground-thaw trailers, all of our units can operate on diesel, natural gas, and propane
- Remote monitoring with text alert features standard on all units
- Units capable of pumping over 30' overhead



Ground Thaw Trailer

Efficiency:	80%	CALL
Fuel Tank Capacity:	230 gal	FOR
Run Time at Full Load:	85 hours	PRICING



Portable Electric Heater

Power:	220V, 30 or 50 amp	DAY \$185
Max Airflow:	360 CFM	WEEK \$555
Maximum Heat:	31,000 BTUs	MONTH \$1665



Portable A/C Unit - KwiKool KIB1411

Cooling Capacity:	13,000 BTU/hr	DAY \$95
Minimum Circuit Amp:	19.575 amps/	WEEK \$285
	105-125 V	MONTH \$855
Operating:	60-110 degrees	



Portable A/C Unit - KwiKool KPO5-21

Cooling Capacity:	60,000 BTU/hr	DAY \$190
Minimum Circuit Amp:	35.5 amps/	WEEK \$570
	208-230	MONTH \$1170
Operating:	65-110 degrees	<u> </u>



Air Mover/Drying Fan

Air Flow:	3000 CFM	DAY \$20
Cord Length:	20 ft	WEEK \$60
Power:	2.5 amps (high)	MONTH \$180
	1.9 (low)	



Air Scrubber/Cleaner (small)

Air Flow/CFM:	300-600	DAY \$50
Power, amps:	3.2	WEEK \$150
Power, HP:	0.5	MONTH \$450
Workspace Area	430-700 ft ²	



Air Scrubber/Cleaner (large)

Air Flow/CFM:	600-1200	DAY \$75
Power, amps:	4.9	WEEK \$225
Power, HP:	0.8	MONTH \$675
Workspace Area:	860-1400 ft ²	



VAPOR ABRASIVE EQUIPMENT CLEANER, EASIER, METHOD TO BLAST WITH LESS DUST AND MINIMAL CLEAN-UP.

Graco Eco-Quip 400T

Max Working Pressure:	125 psi	DAY \$950
Operating Temperature:	35° – 110° F	WEEK \$2850
Air Compressor:	375 CFM	MONTH \$8550
Blast Hose Size	1.25 in. ID	
Abrasive Capacity:	880 lb	
Dry Weight:	6000 lb	
Water Tank Volume:	130 gallon	



About Vapor Abrasive Blasting

- Generates less dust 92% less airborne dust than dry blasting
- Optimizes air, water and media ratio resulting in a fine mist with a blast that is powerful, but with less dust
- Uses less water than traditional water-based wet blasting
- Uses less media than wet blasting, so clean up is minimal and you save on media costs

50' Blast Hose Extension	\$40/day \$120/week \$360/month
50' Air Hose Extension	\$30/day \$90/week \$270/month
Crushed Glass Media	\$9.25 (50LB bag) for blasting concrete/masonry or when a light blast is required.
Garnet Blast Media	\$17.80 (55LB bag) for blasting steel or when an aggressive blast is required.



Questions? Contact our equipment specialists:

Chris Hawkins

Equipment and Installation Specialist chawkins@chasephipps.com

Heath Warner Climate Control Specialist hwarner@chasephipps.com

Vision: Customers and suppliers will consider Phipps to be a first choice distributor of high quality and innovative construction products and equipment. Phipps also will provide employees with the opportunity to have a fulfilling work experience.

Mission: Phipps helps contractors put work in place correctly and profitably by supplying high quality and innovative products and equipment, technical expertise, and trusted service.

Customers Served

- General contractors
- Renovations
- Concrete
- Masonry
- Other sub-trades

Markets Served

- · Infrastructure
- Manufacturing
- Industrial
- Commercial
- Institutional

Equipment Repair and Service Offered at our Cleveland, Canton, and Toledo Branches.



Cleveland:

Main Office & Warehouse 4560 Willow Parkway Cleveland, OH 44125 1-800-362-9267

Canton:

Branch Office & Warehouse 2993 Perry Drive SW Canton, OH 44706 1-877-258-7601

Toledo:

Branch Office & Warehouse 12450 Williams Road Perrysburg, OH 43551 800-860-3352



April 2022











